RCP 1000

Remote Control Panel for the SGS 408




FEATURES

- Enables complete remote control of switching and picture control functions of the SGS 408 Seamless Graphics Switcher via 4-pin XLR connector
- Designed for tabletop operation from up to 1,000 feet (300 m) away Allows the switcher to be rack-mounted near source equipment.
- Maintains bi-directional communications with the SGS 408 Allows switches and adjustments from one device while the other device is updated.
- Input selection control for program and preview outputs The switch operator
 uses two sets of input buttons: one set controlling the "program" output and the
 other controlling the "preview" output. The switch operator can view the next switch
 by selecting it through the "preview" keys. At that time, the operator can seamlessly
 switch the "preview" to the "program" output or choose a digital transition effect to
 use when the physical switch is made. A black screen button is also provided for black
 screen output.
- Comprehensive picture controls Brightness, contrast, horizontal and vertical shift, horizontal and vertical centering, freeze frame, eight user-selectable levels of horizontal filtering, and five user-selectable levels of vertical filtering are provided. Horizontal filtering minimizes the loss of picture detail, and vertical filtering reduces flicker.
- Transition effects selection buttons The type of switch used between "preview" and "program" outputs can be controlled. A seamless cut and a choice of four effect presets are provided. The RCP 1000 effect presets are the same as the SGS 408 front panel effect presets.
- May be used in conjunction with an ECP 1000

DESCRIPTION

The Extron **RCP 1000** Remote Control Panel enables complete control over the switching and picture control functions of the SGS 408 Seamless Graphics Switcher from a remote location. The RCP 1000 is designed to be placed on the operator's table for convenient operation of the SGS 408 from up to 1,000 feet (300 meters) away, allowing the SGS 408 to be rack-mounted near source equipment. The RCP 1000 holds bi-directional communications with the SGS 408, allowing switches and adjustments from one device while the other device is updated. The RCP 1000 may be used in conjunction with an ECP 1000. A 4-pin XLR connector is provided for connection to an SGS 408.

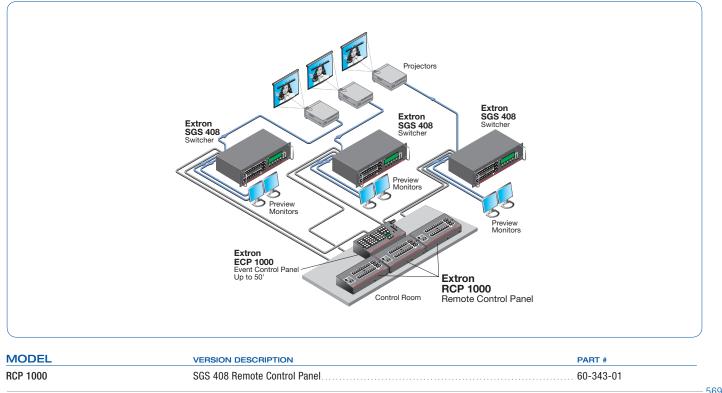

Europe +31.33.453.4040 / +800.3987.6673 +31.33.453.4050 FAX

Asia +65.6383.4400 / +800.7339.8766 +65.6383.4664 FAX Japan +81.3.3511.7655 +81.3.3511.7656 FAX © 2007 Extron Electronics. All rights reserved. Pricing and specifications may change without notice

Extron